

Judul Karya Ilmiah : A Prototype of a Quad Rotor System for Forest Fire Monitoring
Bentuk Karya : Proceeding Internasional tidak terakreditasi: Proceedings of
International Conference on Satellite Technology (ICST) 2017
Link Full Paper : <http://siregar.staff.telkomuniversity.ac.id/files/2019/01/7-ICST-2017.pdf>
Similarity : 4%

ISSN 2598-5965

PROCEEDINGS OF
INTERNATIONAL CONFERENCE
ON SATELLITE TECHNOLOGY

BANDUNG, 3 NOVEMBER 2017



SCHOOL OF ELECTRICAL ENGINEERING & INFORMATICS
INSTITUT TEKNOLOGI BANDUNG

Paper Presentation Schedule International Conference on Satellite Technology (ICST) 2017

Time	Paper ID & Title	Page
09:30 - 09:45	#1570409442 – A Prototype of a Quadrotor System for Forest Fire Monitoring <i>Simon Siregar, Muhammad Ikhsan Sani, Marlindia Ike Sari and Ismail</i>	5
09:45 - 10:00	#1570400049 – Electronic Seal as Secure Movement Tracker and Real-Time Traffic Monitoring using Social Media <i>Emir M. Husni, Surya Michrandi Nasution and Pranoto H. Rusmin</i>	11
10:00 - 10:15	#1570392604 – VMPC Stream Cipher for Secure Blackbox Flight Data Recorder <i>Elsza Szylyviandhita Putri, Surya Michrandi Nasution and Fairuz Azmi</i>	17
10:15 - 10:30	#1570399166 – Single Objective Optimization for Weight Sizing of LEO Communication Satellite <i>Luqman Fathurrohlim, Ridanto Eko Poetro and Ahmad Fariz</i>	23
10:30 - 10:45	#1570409373 – Impact of Cooling Schedule of SeeR: Simulated Annealing-based Routing in DTNs Vehicle-Based <i>Sendy Achdika Maulana, Leanna Vidya Yovita and Tody Ariefianto Wibowo</i>	29
10:45 - 11:00	#1570409415 – Data and Display Software Development for X-band Air Surveillance Radar <i>Sulistyaningsih and Prasetyo Putranto</i>	35
11:00 - 11:15	#1570409695 – Thermal Validation Testing of Automatic Identification System (AIS) Receiver for Low Earth Orbit (LEO) CubeSat <i>Emir Husni and Nazmi Febrian</i>	41
13:30 - 13:45	#1570366497 – Rhino Conservation Monitoring System (Field Data Transmission Using DTN) <i>Griffani Megiyanto R. and Ary Setijadi Prihatmanto</i>	47
13:45 - 14:00	#1570366513 – ITB Tour Guide System With IBeacon <i>Rolty Glendy Wowiling and Emir Mauludi Husni</i>	53
14:00 - 14:15	#1570385877 – Automated Rules for Detection System from Distributed Denial of Service, Brute Force and Scanning Attacks Using Decision Tree Algorithm <i>Muhammad Raditya, Ernawan, Surya Michrandi Nasution and Fairuz Azmi</i>	59
14:15 - 14:30	#1570392152 – Consultation Request Algorithm in Distance Based Intrusion Detection Network <i>Yudha Purwanto, Kuspriyanto, Hendrawan and Budi Rahardjo</i>	65

A Prototype of a Quad Rotor System For forest fire Monitoring

Simon Siregar¹, Muhammad Ikhsan Sani¹, Marlindia Ike Sari¹, Ismail²

¹ Department of Computer Engineering, Faculty of Applied Science, Telkom University, Bandung, Indonesia
² Department of Computer System, Faculty of Electrical Engineering, Telkom University, Bandung, Indonesia

Indonesia as a tropical country which also known as archipelago country have vast forest and ocean. There are several natural disaster in Indonesia, one of them is forest fire which can be happened by man-made cause as brought on by slash-and-burn culture or by natural environment cause. One solution to resolve this issue is by designing a system which can be used to monitor the forest. In this research, a fire monitoring system using visual camera in an unmanned aircraft (Unmanned Aerial Vehicle, UAV) is proposed. The method for detecting the fire is HSV filter and countour filter. The video will be process in ground station to determine whether are there any possibility fire or not. The main result of this paper is a quad rotor system that capable to autonomously navigate between way points and send video to ground station.

Keywords: Quadrotor System, Fire Tracking, OpenCV, HSV filter.

1. INTRODUCTION

Lately, environmental issues on land and forest disaster happened in Indonesia. The impact of fire that perceived human form in economic loss and environment-health problem¹. Information system for supporting the fire fighting department was usually done by experts which analyzing data provided which by towers, manned airborne-system and satellites and estimate, by visually or from images gathered by cameras, the estimation rate of spread and height of incident flames².

Merino et.al. (2010)² presents the implementation of aerial robots for the fire monitoring. This paper also presents an experiment result of controlled forest fires monitoring system using multiple UAV's fleet.

Unmanned Aerial Vehicle (UAV) or so-called unmanned aerial vehicle is a vehicle that has the ability to fly can operate without a pilot in the vehicle. UAV is an unmanned aerial vehicle that one operation by means of remotely controlled. UAVs can be either plane or helirotor using a navigation system independent. Basically plane, or helirotor can be

considered to be aerial vehicles that can carry out missions that are useful and can be controlled remotely or automatically have the ability to fly³.

Some studies show that there are several methods to detect Fire like hyperspectral cameras, image intensifiers and thermal cameras that have previously been limited in use due to cost or technology considerations are now becoming widely available and affordable⁴. Beside the fire, prior research shows that fire detection can be performed by smoke detecting in real time⁵.

In this paper a research to design an automated quadrotor system using a rotary wing and forest fire monitoring system is proposed. The fire monitoring system send the video from onboard visual camera in quadrotor to ground station. The video will be process using image processing application to detect the layout of the fire point.

2. QUAD ROTOR

A quadrotor helirotor (quadrotor) is a four equally spaced rotors helicopter. The quadcopter motion is

*Email Address: simon.siregar@tass.telkomuniversity.ac.id

controlled by motion controller which adjusting the angular velocities which are spun by electric motors. Because of the simple structure of a quadcopter, quadcopters are used in surveillance, search and rescue, construction inspections and several other applications.

The quadcopter formation is presented in Figure 1. The dynamics of a general X type-quad rotor which determine the angular velocities which produce by the electrical motor and as the result are torques and forces⁶

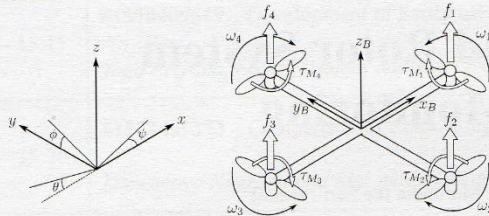


Fig. 1. The kinematic and dynamics in body frames of a quadcopter

In general, this research use the design of quadrotor frame is shown in figure 2 on the left. In general, a quadrotor consists of a center plate and four arms which used as propulsion system. The main plate is usually made by several type of material. Some is use carbon fiber material, plastic and other is using aluminum plate. The material will give strength to the structure. This main plate is used to install motion control, telemetry system, sensors and battery. The four arms are usually made of plastik or carbon fiber and they are connected to the main plate. Usually the ESC of the propulsion system is installed in arm. The picture on the right of figure 2 is shown the development of hexarotor which means of six arm.



Fig. 2. Basic Quad and Hex Rotor frame Unmanned

3. AUTOPILOT

Autopilots is a function control system which provide critical functionality to control the trajectory of the platform. In the implementation of this motion controll, there are several dedicated hardware which available in the market, such as DJI, Ardupilot, PixHawk, etc. Among available autopilot implementation version, in this research, Ardupilot is chosen as one of a mature open-source project that provides reliable autopilot functionality for aerial drones. In general, the ardupilot module is shown in figure 2.

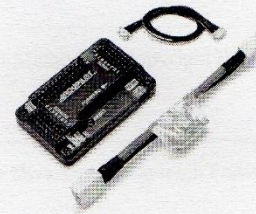


Fig. 3. Ardupilot/Ardupflyer module

4. QUADROTOR SYSTEM DESIGN

With six degrees of freedom, that are three translational which drive the motion of surge, heave and sway and three rotational which drive the motion of roll, pitch and yaw, and only four independent inputs (rotor speeds to control the DC motor), a quadrotor control system is an interesting problem and are severely underactuated. In this proposed system consists of 3 parts, namely: Basic quadrotor configuration system, Camera on board system and proposed quadrotor configuration system. The general concept of the Autopilot/motion control system is shown in figure 4. In figure 5, the configuration-block diagram of the proposed camera syatem is shown. Figure 6 describe the proposed of all system.

In general, the basic quadrotor configuration consists of Sensors, microcontroller, actuators and communication module, which monitor and control the four motor. The sensors in this system are Global Positioning Sytem (GPS) sensor, compas sensor, and altitude/barometer sensor. All sensors which are mention before commonly known as Inertial Measurement Unit (IMU) Sensor.

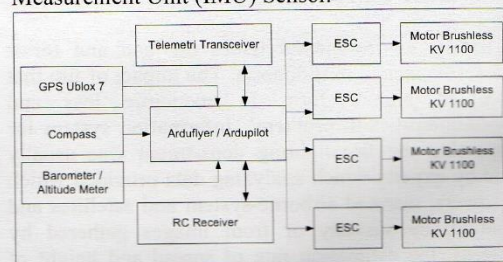


Fig. 4. Basic Quad Rotor Electronic Configuration System

The quadrotor will send the IMU data by using Telemetry Tranceiver. In this system, RC receiver function as a receiver which receive command from ground station how the quadrotor move.

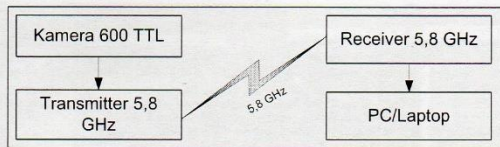


Fig. 5. Camera onboard configuration

In this paper, the configuration design of the camera on board in quadrotor consist of camera 600 TTL which will transmit the video using 5,8 GHz transmitter and the video can be seen in ground station in personal computer (PC).

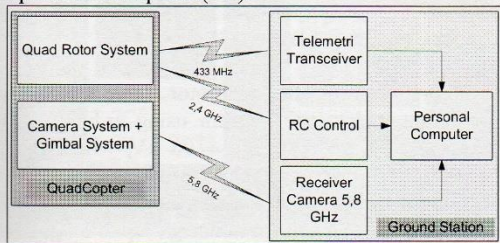


Fig. 6. Proposed Quad Rotor Configuration System

In this research, the configuration of the system proposed system is shown in figure 5. In this figure, every data and video is sent to personal computer. The personal computer will process the data and video and shown as information. The video which processed in personal computer will show wheather there is one or more firespots. In table 1, the proposed specification for the autonomous quadrotor.

Table.1. Specification of Proposed Quadrotor System.

Part Name	Specification
Propultion System	Motor 1100 kV
Motor Driver	ESC (Electronic Speed Controller) 20A
Battery	4Cell LIPO 2200mAH
Propeller	10x4.5 CW+CCW Black Nylon
Frame	F450 Multi-Rotor Air Frame Flame White+Yellow
Flight Controller	RCTimer ArduFlyer Kit V2.5.2
GPS	Neo 7 UBlox
Camera Video Transmitter	FAT SHARK DOMINATOR V3 Camera. Max 720p
Camera Receiver	FAT SHARK DOMINATOR Goggle Receiver 5,8 GHz
Telemetri Transceiver	3DR Radio Telemetry Kit 433Mhz Module For APM
Gimbal	Brushless FeiyuTech 3-Axis Gimbal
Dimension	45 x 45 x 20 cm (With GPS Antenna)

5. QUADROTOR AUTONOMOUS SYSTEM DESIGN

For quadrotor autonomous flight controlling system, the Arduino Atmega 2560 embedded processor is used in Arduflyer 2.5.2 board. Sensor which embedded in the Arduflyer are the inertial measurement unit (IMU). IMU which consists of 3-axis accelerometer and gyroscope. The accelerometer is used to measure the Earth's acceleration vector, while gyroscope is needed to measure the rate of rotation around an axis. An external GPS, as used as position sensor, is connected to the flight controller. This external GPS is also integrated with Compas.

All sensor which integrated in the flight controller in quadrotor system is guided with an open source APM Copter firmware. In ground station, Mission Planner, an open source application from ardupilot.org, is installed. This application is enable the flight controller to flight in autonomous mode and send flight information to ground station. Figure 7 shows one example of how to configure waypoint in Mission Planner 7 jam.



Fig. 7. Mission planner autonomous waypoint planning

6. FIRE MONITORING SYSTEM DESIGN

After the system is configured accordance to the proposed concept, figure 7 shows the flowchart used for fire monitoring. The software library that was used in this proposed fire monitoring system is OpenCV (Open Source Computer Vision Library). OpenCV is a open source library which have programming functions for a real-time computer vision. OpenCV is written in pure C ++ and several other programming language and in multiplatform operating sytem. The OpenCV library has more than 2500 optimized algorithms. The algorithm can be used to detect faces, identify objects, classify human actions in video, track camera movements, move object tracking, find similar images from image databases, augmented reality, and others. The openCV's libraries that was used in this research are HSV filter and Counter Filter⁸. In general this library is used to determine colour and shape.

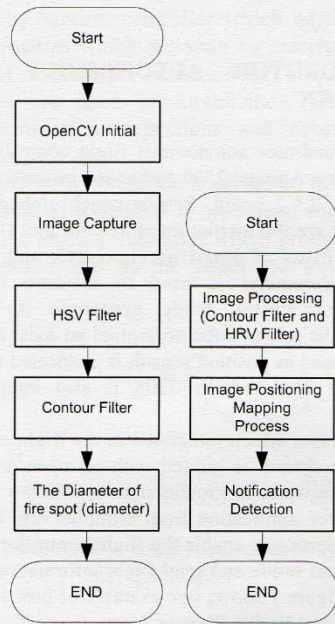


Fig. 8. Proposed fire monitoring flow chart

Figure 8 shows the flowchart for detecting fire using HSV and contour filter. After found the fire spot, the system will then mapping the fire spot position. The position algorithm for the fire spots is shown in figure 9, where every camera resolution pixel, which is reduce to 320x240 pixel, is divided into 15 segmen in horizontal and vertical pixel. If a fire is detected, then the position of the fire is showed in which segmen.

Pixel	0	40	120	200	280	320
0	0001	0010	0011	0100	0101	
140	0110	0111	1000	1001	1010	
200	1011	1100	1101	1110	1111	
240						

Fig. 9. Proposed fire monitoring position algorithm

Figure 10 shows the output of camera which used the process of flowchart in figure 6 and fire monitoring position algorithm. In this experiment, an orange ball is used to simulate the color of fire. The proposed system in this experiment can determine the size and track the position of the ball.

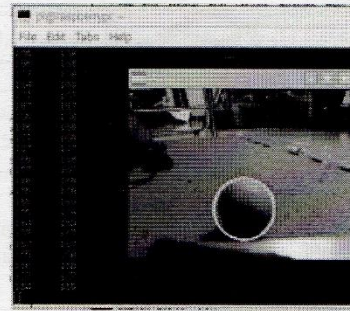


Fig. 10. Color tracking

7. RESULTS AND DISCUSSION

Figure 11 shows the quadrotor frame which used four motor and control system using ardupilot. The motors have a specification 1100 kV, which means there are 1100 rpm (rotation per minute) per volt. With this motor using 4 cell batery (approximately 14,8 volt), the quadrotor can lift its weight up to 3 kg.

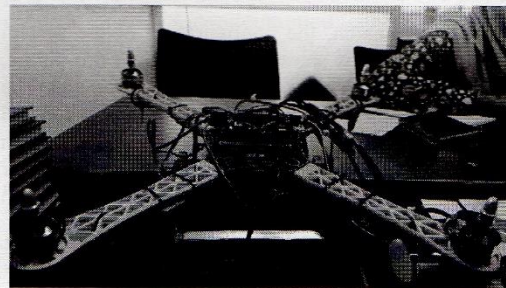


Fig. 11. Proposed Quad Rotor System

Figure 10 shows the output of camera that test a candle as the source of fire. In this experiment, in indoor environment the system can determine in several position of the candle. The problem using this algorithm in this experiment is the change of brightness can interference the ability of the camera to detect the fire. If the environment is in extra bright condition the system can not detect the fire. The experiment result is shown in table 1.





Fig. 12. Proposed fire monitoring system using a candle as fire example

Table 2. Experiment Result.

Condition	Distance	Detection	Information
Dark	1 meter	Yes	indoor
Normal	1 meter	Yes	indoor
Extra bright	1 meter	No	indoor

CONCLUSION

Fire detection system which is built in this research is function as in proposed system. In general, the experiment on camera system is held on indoor and it was able sending data to ground control and identified the hotspots.

Several improvement that can be done in this system is combining IR camera to improve the accuracy and ability to detect fire.

ACKNOWLEDGMENT

This research was supported by Embedded and Network System Research Laboratory, Faculty of Applied Science, Telkom University for the research facility and infrastructure support and to Department research and community service Telkom University, Indonesia, for providing financial support for this work through Internal Funded Research grant batch 1, 2016.

REFERENCES

- [1] D. Karya, H. Hasan, E. A. Kadir. Impact of Forest Fire to Economic and Environment in Riau Province Indonesia. *International Business Management* 11(2) : 474-477, Medwell Journal. ISSN: 1993-5250. 2017.
- [2] L. Merino, F. Caballero, J. R. Martínez-de-Dios, I. Maza, and A. Ollero. Automatic Forest Fire Monitoring and Measurement using Unmanned Aerial Vehicles. *International Conference on Forest Fire Research*. D. X. Viegas (Ed.), 2010
- [3] A. C. Watts, V. G. Ambrosia, E. A. Hinkley. Unmanned Aircraft Systems in Remote Sensing and Scientific Research: Classification and Considerations of Use. *Remote Sens.* 2012, 4, 1671-1692; doi:10.3390/rs4061671. ISSN 2072-4292.
- [4] A. Filonenko, D. C. Hernández and K. H. Jo, "Real-time smoke detection for surveillance," 2015 IEEE 13th International Conference on Industrial Informatics (INDIN), Cambridge, 2015, pp. 568-571. doi: 10.1109/INDIN.2015.7281796
- [5] R. S. Allison, J. M. Johnston, G. Craig, S. Jennings. Airborne Optical and Thermal Remote Sensing for Wildfire Detection and Monitoring. *Sensors* 2016, 16, 1310; doi:10.3390/s16081310
- [6] T. Luukkonen. Modelling and control of quadcopter. School of Science. Mat-2.4108. 2011.
- [7] S. Mitra, B. Land Autonomous Quadcopter Docking System. Design Project Final Report-Cornell University, 2013.
- [8] B.P. Yeshwant, Computer Vision Based Fire Flame Detection, *International Journal Of Engineering, Education And Technology (ARDIJET)* ISSN 2320-883X, VOLUME 3, ISSUE 2, 01/04/2015

A Prototype of a Quad rotor System for forest fire Monitoring

By Simon Siregar

WORD COUNT

2176

TIME SUBMITTED

23-OCT-2017 11:26PM

PAPER ID

32396776

A Prototype of a Quad Rotor System for forest fire Monitoring

Simon Siregar, Muhammad Ikhsan Sani,
Marlindia Ike Sari
Department of Computer Engineering
Faculty of Applied Science, Telkom University
Bandung, Indonesia
simon.siregar@tass.telkomuniversity.ac.id

Ismail
Department of Computer System
Faculty of Electric Engineering, Telkom University
Bandung, Indonesia

Abstract— Indonesia as a tropical country which also known as archipelago country have vast forest and ocean. There are several natural disaster in Indonesia, one of them is forest fire which can be happened by man-made cause as brought on by slash-and-burn culture or by natural environment cause. One solution to resolve this issue is by designing a system which can be used to monitor the forest. In this research, a fire monitoring system using visual camera in an unmanned aircraft (Unmanned Aerial Vehicle, UAV) is proposed. The method for detecting the fire is HSV filter and countour filter. The video will be process in ground station to determine whether are there any possibility fire or not. The main result of this paper is a quad rotor system that capable to autonomously navigate between way points and send video to ground station.

Keywords— Quadrotor System, UAV, Fire Tracking, OpenCV, HSV filter.

I. INTRODUCTION

Lately, environmental issues on land and forest disaster happened in Indonesia. The impact of fire that perceived human form in economic loss and environment-health problem. [1] Information system for supporting the fire fighting department was usually done by experts which analyzing data provided which by to 2rs, manned airborne-system and satellites and estimate, by visually or from images gathered by cameras, the estimation rate of spread and height of incident flames. [2]

Merino et.al. (2010) [2] presents the implementation of aerial robots for the fire monitoring. This paper also presents an experiment result of controlled forest fires monitoring system using multiple UAV's fleet.

Unmanned Aerial Vehicle (UAV) or so-called unmanned aerial vehicle is a vehicle that has the ability to fly can operate without a pilot in the vehicle. UAV is an unmanned aerial vehicle that one operation by means of remotely controlled. UAVs can be either plane or helirotor using a navigation system independent. Basically plane, or helirotor can be considered to be aerial vehicles that can carry out missions that are useful and can be controlled remotely or automatically have the ability to fly. [3]

The studies show that there are several methods to detect Fire like hyperspectral cameras, image intensifiers and thermal cameras that have previously been limited in use due to cost or technology considerations are now becoming widely available

and affordable[4]. Beside the fire, prior research shows that fire detection can be performed by smoke detecting in real time[5].

In this paper a research to design an automated quadrotor system using a rotary wing and forest fire monitoring system is proposed. The fire monitoring system send the video from onboard visual camera in quadrotor to ground station. The video will be process using image processing application to detect the layout of the fire point.

II. QUAD ROTOR

A quadrotor helirotor (quadrotor) is a four equally spaced rotors helicopter. The quadcopter motion is controlled by motion controller which adjusting the angular velocities which are spun by electric motors. Because of the simple structure of a quadcopter, quadcopters are used in surveillance, search and rescue, construction inspections and several other applications.

The quadcopter formation is presented in Figure 1. The dynamics of a general X type-quad rotor which determine the angular velocities which produce by the electrical motor and as the result are torques and forces. [6]

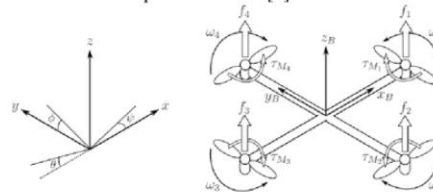


Fig. 1. The kinematic and dynamics in body frames of a quadcopter

In general, this research use the design of quadrotor frame is shown in figure 2 on the left. In general, a quadrotor consists of a center plate and four arms which used as propulsion system. The main plate is usually made by several type of material. Some is use carbon fiber material, plastic and other is using aluminum plate. The material will give strength to the structure. This main plate is used to install motion control, telemetry system, sensors and battery. The four arms are usually made of plastik or carbon fiber and they are connected to the main plate. Usually the ESC of the propulsion system is installed in arm. The picture on the right of figure 2

is shown the development of hexarotor which means of six arm.



Fig. 2. Basic Quad and Hex Rotor frame Unmanned

III. AUTOPILOT

Autopilots is a function control system which provide critical functionality to control the trajectory of the platform. In the implementation of this motion control, there are several dedicated hardware which available in the market, such as DJI, Ardupilot, Pixhawk, etc. Among available autopilot implementation version, in this research, Ardupilot is chosen as one of a mature open-source project that provides reliable autopilot functionality for aerial drones. In general, the ardupilot module is shown in figure 2.



Fig. 3. Ardupilot/Arduflyer module

IV. QUADROTOR SYSTEM DESIGN

With six degrees of freedom, that are three translational which drive the motion of surge, heave and sway and three rotational which drive the motion of roll, pitch and yaw, and only four independent inputs (rotor speeds to control the DC motor), a quadrotor control system is an interesting problem and are severely underactuated. In this proposed system consists of 3 parts, namely: Basic quadrotor configuration system, Camera on board system and proposed quadrotor configuration system. The general concept of the Autopilot/motion control system is shown in figure 4. In figure 5, the configuration-block diagram of the proposed camera system is shown. Figure 6 describe the proposed of all system.

In general, the basic quadrotor configuration consists of Sensors, microcontroller, actuators and communication module, which monitor and control the four motor. The sensors in this system are Global Positioning System (GPS) sensor, compass sensor, and altitude/barometer sensor. All sensors which are mentioned before commonly known as Inertial Measurement Unit (IMU) Sensor.

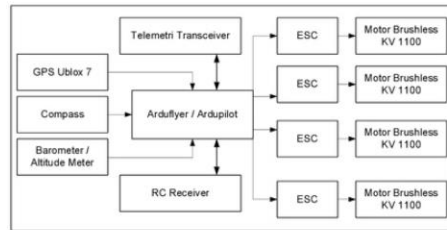


Fig. 4. Basic Quad Rotor Electronic Configuration System

The quadrotor will send the IMU data by using Telemetry Transceiver. In this system, RC receiver function as a receiver which receive command from ground station how the quadrotor move.




Fig. 5. Camera onboard configuration

In this paper, the configuration design of the camera on board in quadrotor consist of camera 600 TTL which will transmit the video using 5,8 GHz transmitter and the video can be seen in ground station in personal computer (PC).

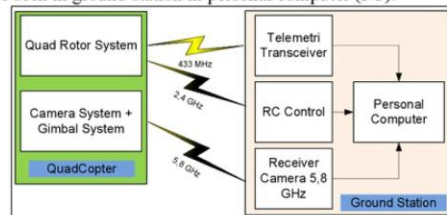


Fig. 6. Proposed Quad Rotor Configuration System

In this research, the configuration of the system proposed system is shown in figure 5. In this figure, every data and video is sent to personal computer. The personal computer will process the data and video and shown as information. The video which processed in personal computer will show whether there is one or more firespots. In table 1, the proposed specification for the autonomous quadrotor.

TABLE I. SPECIFICATION OF PROPOSED QUADROTOR SYSTEM

Part Name	Specification
Propulsion System	Motor 1100 kV
Motor Driver	ESC (Electronic Speed Controller) 20A
Battery	4Cell LIPO 2200mAh
Propeller	10x4.5 CW+CCW Black Nylon
Frame	F450 Multi-Rotor Air Frame Flame White+Yellow
Flight Controller	RCTimer ArduFlyer Kit V2.5.2

Part Name	Specification
GPS	Neo 7 UBlox
Camera Video Transmitter	FAT SHARK DOMINATOR V3 Camera. Max 720p
Camera Receiver	FAT SHARK DOMINATOR Goggle Receiver 5,8 GHz
Telemetry Transceiver	3DR Radio Telemetry Kit 433Mhz Module For APM
Gimbal	Brushless FeiyuTech 3-Axis Gimbal
Dimension	45 x 45 x 20 cm (With GPS Antenna)

V. QUADROTOR AUTONOMOUS SYSTEM DESIGN

For quadrotor autonomous flight controlling system, the Arduino Atmega 2560 embedded processor is used in Arduflyer 2.5.2 board. Sensor which embedded in the Arduflyer are the inertial measurement unit (IMU). IMU which consists of 3-axis accelerometer and gyroscope. The accelerometer is used to measure the Earth's acceleration vector, while gyroscope is needed to measure the rate of rotation around an axis. An external GPS, as used as position sensor, is connected to the flight controller. This external GPS is also integrated with Compass.

All sensor which integrated in the flight controller in quadrotor system is guided with an open source APM Copter firmware. In ground station, Mission Planner, an open source application from ardupilot.org, is installed. This application is enable the flight controller to flight in autonomous mode and send flight information to ground station. Figure 7 shows one example of how to configure waypoint in Mission Planner[7].



Fig. 7. Mission planner autonomous waypoint planning

VI. FIRE MONITORING SYSTEM DESIGN

After the system is configured accordance to the proposed concept, figure 7 shows the flowchart used for fire monitoring. The software library that was used in this proposed fire monitoring system is OpenCV (Open Source Computer Vision Library). OpenCV is a open source library which have programming functions for a real-time computer vision. OpenCV is written in pure C++ and several other programming language and in multiplatform operating sytem. The OpenCV library has more than 2500 optimized algorithms. The algorithm can be used to detect faces, identify objects, classify human actions in video, track camera

movements, move object tracking, find similar images from image databases, augmented reality, and others. The openCV's libraries that was used in this research are HSV filter and Counter Filter[8]. In general this library is used to determine colour and shape.

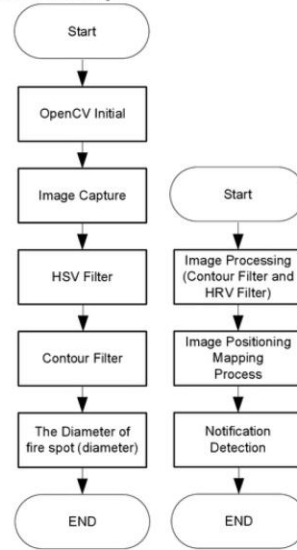


Fig. 8. Proposed fire monitoring flow chart

Figure 8 shows the flowchart for detecting fire using HSV and contour filter. After found the fire spot, the system will then mapping the fire spot position. The position algorithm for the fire spots is shown in figure 9, where every camera resolution pixel, which is reduce to 320x240 pixel, is divided into 15 segmen in horizontal and vertical pixel. If a fire is detected, then the position of the fire is showed in which segmen.

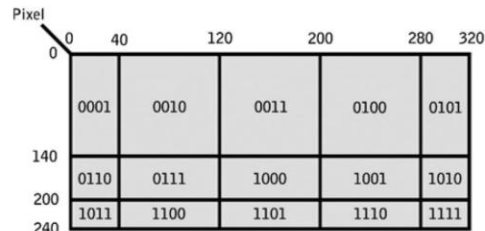


Fig. 9. Proposed fire monitoring position algorithm

Figure 10 shows the output of camera which used the process of flowchart in figure 6 and fire monitoring position algorithm. In this experiment, an orange ball is used to simulate the color of fire. The proposed system in this

experiment can determine the size and track the position of the ball.

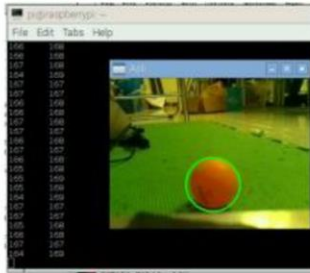


Fig. 10. Color tracking

VII. RESULTS AND DISCUSSION

Figure 11 shows the quadrotor frame which used four motor and control system using ardupilot. The motors have a specification 1100 kV, which means there are 1100 rpm (rotation per minute) per volt. With this motor using 4 cell battery (approximately 14,8 volt), the quadrotor can lift its weight up to 3 kg.



Fig. 11. Proposed Quad Rotor System

Figure 10 shows the output of camera that test a candle as the source of fire. In this experiment, in indoor environment the system can determine in several position of the candle. The problem using this algorithm in this experiment is the change of brightness can interference the ability of the camera to detect the fire. If the environment is in extra bright condition the system can not detect the fire. The experiment result is shown in table 1.

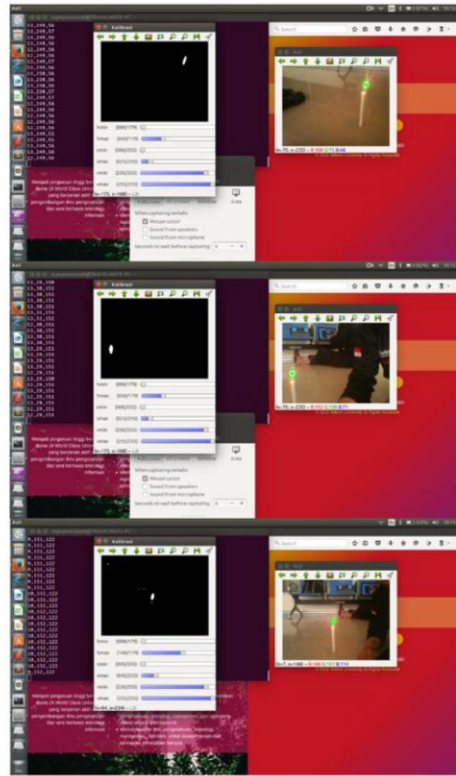


Fig. 12. Proposed fire monitoring system using a candle as fire example

TABLE II. EXPERIMENT RESULT

Condition	Distance	Detection	Information
Dark	1 meter	Yes	indoor
Normal	1 meter	Yes	indoor
Extra bright	1 meter	No	indoor

CONCLUSION

Fire detection system which is built in this reseach is function as in proposed system. In general, the experiment on camera system is held on indoor and it was able sending data to ground control and identified the hotspots.

Several improvement that can be done in this system is combining IR camera to improve the accuracy and ability to detect fire.

ACKNOWLEDGMENT

This research was supported by Embedded and Network System Research Laboratory, Faculty of Applied Science, Telkom University for the research facility and infrastructure support and to Department research and community service Telkom University, Indonesia, for providing financial support

for this work through Internal Funded Research grant batch 1, 2016.

REFERENCES

- [1] D. Karya, H. Hasan, E. A. Kadir. Impact of Forest Fire to Economic and Environment in Riau Province Indonesia. *International Business Management* 11(2) : 474-477, Medwell Journal. ISSN: 1993-5250. 2017.
- [2] L. Merino, F. Caballero, J. R. Martínez-de-Dios, I. Maza, and A. Ollero. Automatic Forest Fire Monitoring and Measurement using Unmanned Aerial Vehicles. *International Conference on Forest Fire Research*. D. X. Viegas (Ed.), 2010
- [3] A. C. Watts, V. G. Ambrosia, E. A. Hinkley. Unmanned Aircraft Systems in Remote Sensing and Scientific Research: Classification and Considerations of Use. *Remote Sens.* 2012, 4, 1671-1692; doi:10.3390/rs4061671. ISSN 2072-4292.
- [4] A. Filonenko, D. C. Hernández and K. H. Jo, "Real-time smoke detection for surveillance," 2015 IEEE 13th International Conference on Industrial Informatics (INDIN), Cambridge, 2015, pp. 568-571. doi: 10.1109/INDIN.2015.7281796
- [5] R. S. Allison, J. M. Johnston, G. Craig, S. Jennings. Airborne Optical and Thermal Remote Sensing for Wildfire Detection and Monitoring. *Sensors* 2016, 16, 1310; doi:10.3390/s16081310
- [6] T. Luukkonen. Modelling and control of quadcopter. School of Science. Mat-2.4108. 2011.
- [7] S. Mitra, B. Land Autonomous Quadcopter Docking System. Design Project Final Report-Cornell University, 2013.
- [8] B.P. Yeshwant, Computer Vision Based Fire Flame Detection, *International Journal Of Engineering, Education And Technology (ARDJEET)* ISSN 2320-883X, VOLUME 3, ISSUE 2, 01/04/2015

A Prototype of a Quad rotor System for forest fire Monitoring

ORIGINALITY REPORT

4%

SIMILARITY INDEX

PRIMARY SOURCES

1	doaj.org Internet	24 words — 1%
2	grvc.us.es Internet	24 words — 1%
3	wiki.hp-see.eu Internet	21 words — 1%
4	Siregar, Simon, and Duddy Soegiarto. "Solar panel and battery street light monitoring system using GSM wireless communication system", 2014 2nd International Conference on Information and Communication Technology (ICoICT), 2014. Crossref	12 words — 1%
5	ntl.bts.gov Internet	8 words — < 1%

EXCLUDE QUOTES ON

EXCLUDE MATCHES OFF

EXCLUDE BIBLIOGRAPHY ON